

iPUMP T GROUND SOURCE HEAT PUMP



iNTELLiGENT HEAT PUMPS FROM AUSTRIA
www.idm-energie.com

© Drobot Dean - fotolia.com

GROUND SOURCE **iPUMP T 2-8** AND **iPUMP T 3-13**

Inverter controlled compact heat pump with integrated drinking water storage.

- ⊙ **Extremely quiet operation**
- ⊙ **COP 4.71 (iPump T 2-8), COP 5.01 (iPump T 3-13)**
- ⊙ **Navigator 2.0 control system with capacitive 7" colour touch display**
- ⊙ **Very small installation space required - only 0.45 m²**
- ⊙ **Heating, cooling & hot water**
- ⊙ **Photovoltaic control**
- ⊙ **Voice control of the most important functions**



© Strichfiguren.de - fotolia.com




© Drobot Dean - fotolia.com

THE **iNTELLIGENT** HEAT PUMP



THE iPUMP HEATS, COOLS AND PROVIDES HOT WATER

If you opt for a ground water or brine heat pump, the iDM iPump T is the perfect solution for you! Besides heating & cooling the iPump offers maximum comfort - within seconds the integrated storage tank provides sufficient hot water - on request up to 75 °C. As a result, the formation of microorganisms such as legionella and other bacteria is prevented.

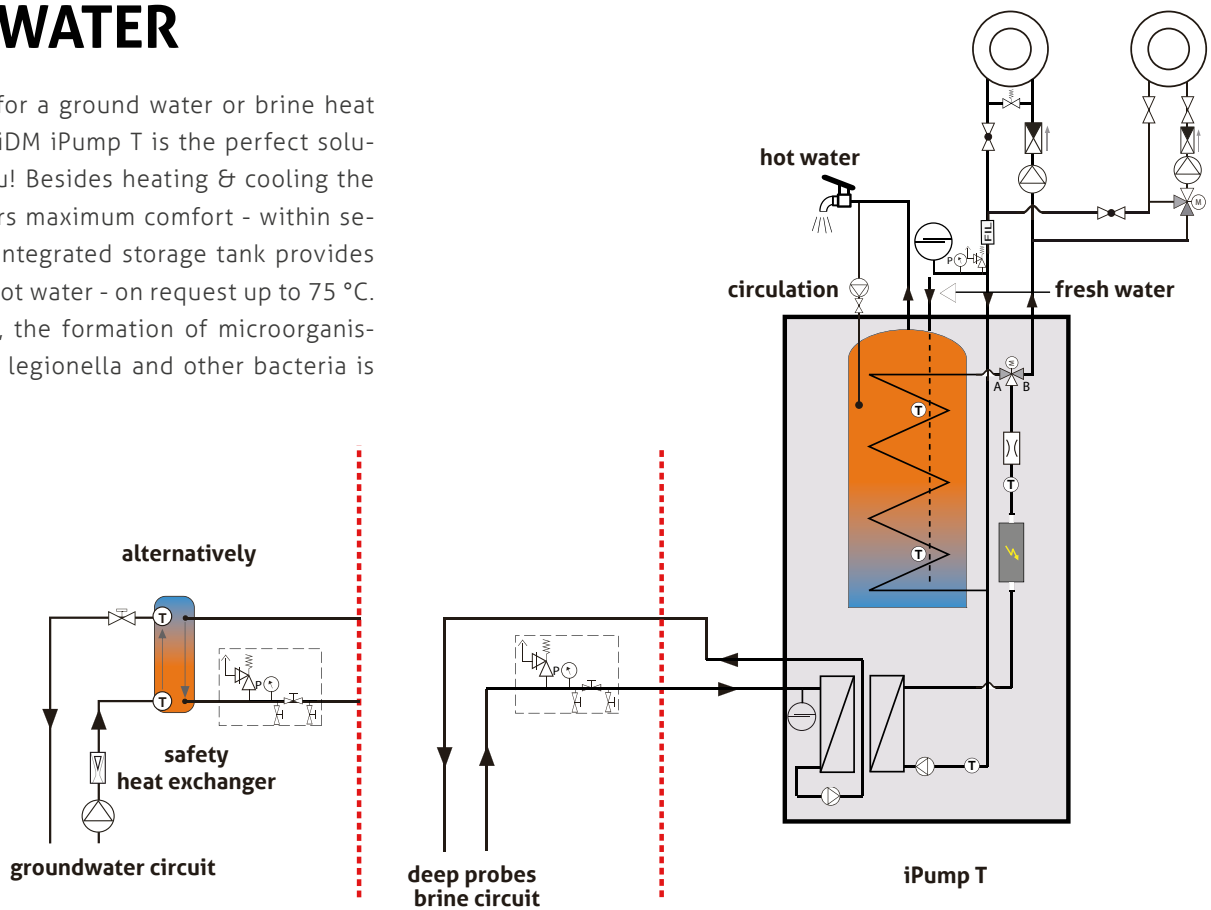

PERFECT FOR DETACHED HOUSE OR MULTIPLE DWELLING

The iPump is not only the perfect solution for detached houses - it is also the perfect choice for multi family dwellings: All iPump heat pumps get their energy from one heat source. This reduces investment costs & installation space and provides heating, cooling and hot water for each residential unit. Other advantages: easy insertion due to divisibility, no losses through a circulation line, due to the individual water heating the complicated counting and invoicing process can be avoided.



TECHNICAL DATA

iPump ground source heat pump

Technical data in compliance with EN14511	UNIT	iPump T 2-8 with passive cooling	iPump T 2-8 P	iPump T 3-13 with passive cooling	iPump T 3-13 P
Inverter technology (modulation)	-	yes	yes	yes	yes
Output range	kW	2 - 8	2 - 8	3 - 13	3 - 13
Energy efficiency class package label brine circuit (heat pump + temperature control) ¹⁾		A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heat output at B0/W35 (brine) at maximum speed	kW	7,85	7,85	13,28	13,28
Heat output at B0/W35 (brine) at nominal speed	kW	4,10	4,10	6,60	6,60
COP at B0/W35 (brine) at nominal speed	-	4,71	4,71	5,01	5,01
Cooling capacity ²⁾ (passiv) B15/W18 (brine) at nominal speed	kW	6,00	-	7,60	-
Cooling capacity (active) B30/W18 (brine) at nominal speed	kW	-	6,37	-	9,70
EER (active) at B30/W18 (brine) at nominal speed	-	-	7,40	-	6,34
Energy efficiency class package label ground water (heat pump + temperature control) ¹⁾		A+++/A+++	A+++/A+++	A+++/A+++	A+++/A+++
Heat output W10/W35 (ground water) at maximum speed	kW	10,03	10,03	13,25	13,25
Heat output W10/W35 (ground water) at nominal speed	kW	5,55	5,55	8,70	8,70
COP at W10/W35 (ground water) at nominal speed	-	6,53	6,53	6,77	6,77
Refrigerant ³⁾	-	R410A	R410A	R410A	R410A
Max. flow temperature	°C	62	62	62	62
Main current power supply	V	230	230	400	230
Control circuit power supply	V	230	230	230	230
Dimensions indoor unit HxWxD	mm	1950 x 600 x 786	1950 x 600 x 786	1950 x 600 x 786	1950 x 600 x 786
Weight	kg	265	265	295	295
Internal unit sound power level	dB(A)	45	45	41	41
Hot water					
Capacity storage tank	l	200	200	200	200
Max. temperature storage tank	°C	55	55	55	55
Max. temperature storage tank with electrical heating unit	°C	75	75	75	75
Singular output capacity at 40°C tapping temperature - heat pump	l	315	315	315	315
Singular output capacity at 40°C tapping temperature - electrical heating unit	l	432	432	432	432

¹⁾ Energy efficiency class according to EU regulation No. 811/2013 heating, at a flow temperature: 35 °C / 55 °C.

²⁾ With integrated passive cooling module.

³⁾ The heat pump contains the F-Gas R410A and is subject to the provisions of F-Gas regulation EU/517/2014.

THE iPUMP T IS AVAILABLE IN TWO VARIANTS:

- ⊙ iPump T with process reversal
- ⊙ iPump T with passive cooling

ALSO PERFECT FOR RESTRUCTURING

- ⊙ Easy insertion due to divisibility
- ⊙ Infinitely variable power adjustment to the restructuring progress
- ⊙ Easy connection of existing plan components - heating circuit connection, cold and hot water connections are directed upwards
- ⊙ All in one – solution for heating and hot water generation



© IDM ENERGIESYSTEME GMBH
 Seblas 16-18 | A-9971 Matrei in Osttirol
 www.idm-energie.com | team@idm-energie.at

02.2024/8183889 • IDM product sheet iPump T
 Changes and errors excepted.